


CERAMIN®

FLOOR



CATALOGUE 2025

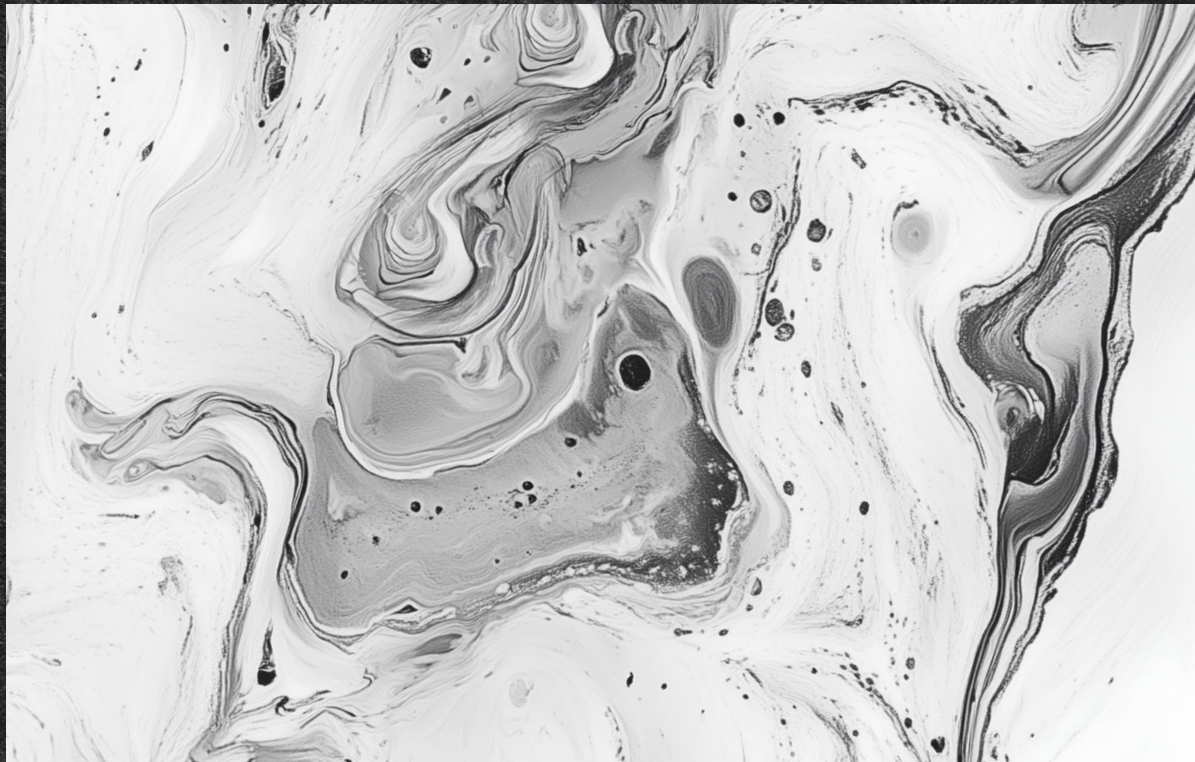

Sustainability - the basis for CLASSEN's corporate philosophy & strategy

As a medium-sized family business, we think in closed cycles; the sustainable and responsible use of resources is a matter of course for us - from the procurement of raw materials to production and recycling. Our nearly 2,000 employees and management team live this philosophy in appreciation of our planet. Since 1962, constant knowledge of what consumers want has brought the CLASSEN Group to where the company is today. Our innovations include not only numerous patents as an expression of our innovative spirit, but above all continuous further development for a long-lasting and sustainable future.



CERAMIN[®] FLOOR

Content

01	INTRODUCTION	4
02	ALL ABOUT ECO	10
03	PRO NATURE	16
04	ALL NATURE	26
05	CERAMIN FLOORING	30
06	GREEN VINYL	44
07	NEO 2.0	58
08	TECHNICAL DATA	64


01 WHAT IS CERAMIN?

CERAMIN is an unique, patented technology


CERAMIN is the natural material that makes the respective end products, such as synthetic flooring, something special. **Healthy to live** with and carefree to use.

As the heart of robust, durable polymer products **without PVC**. As a natural, pollutant-free material for long-lasting health. As the only market-ready alternative „Made in Germany“ that already makes, for example, 100 % recyclable polymer floors and does not burden the environment and the future of our children.

The floor boards are dimensionally stable, robust, 100% waterproof, UV-resistant, easy to clean and simple and safe to install thanks to the quick installation systems.

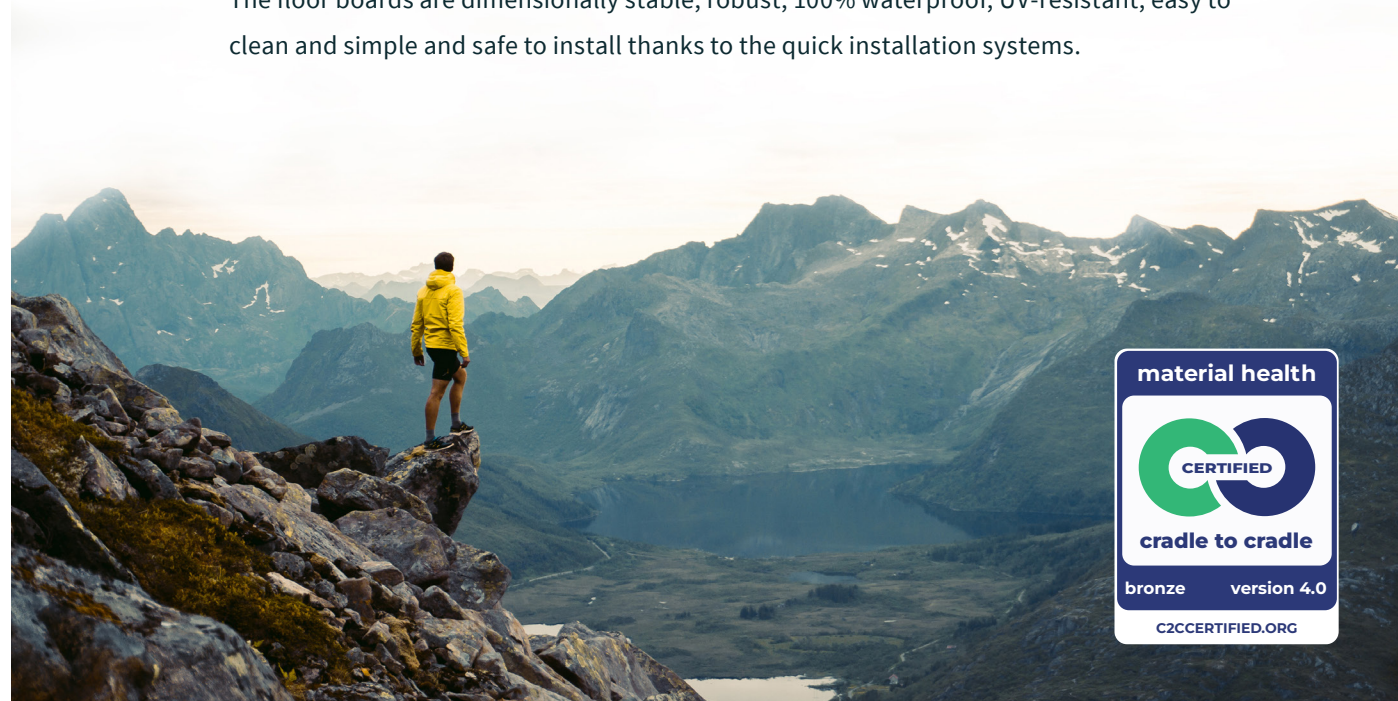

FUTURE. NOW.



100% WATER
RESISTANCE



ACOUSTIC
COMFORT




PVC
FREE



QUICK AND EASY
INSTALLATION




MADE WITH RECYCLED
MATERIALS




NO SMELL




KIDS AND PETS
FRIENDLY




DIMENSIONAL
STABILITY



100%
RECYCABLE



FLOOR
HEATING



WITHOUT DOORS
EXPANSION JOINTS




ROBUST



DURABLE



HEALTHY
FOR LIVING

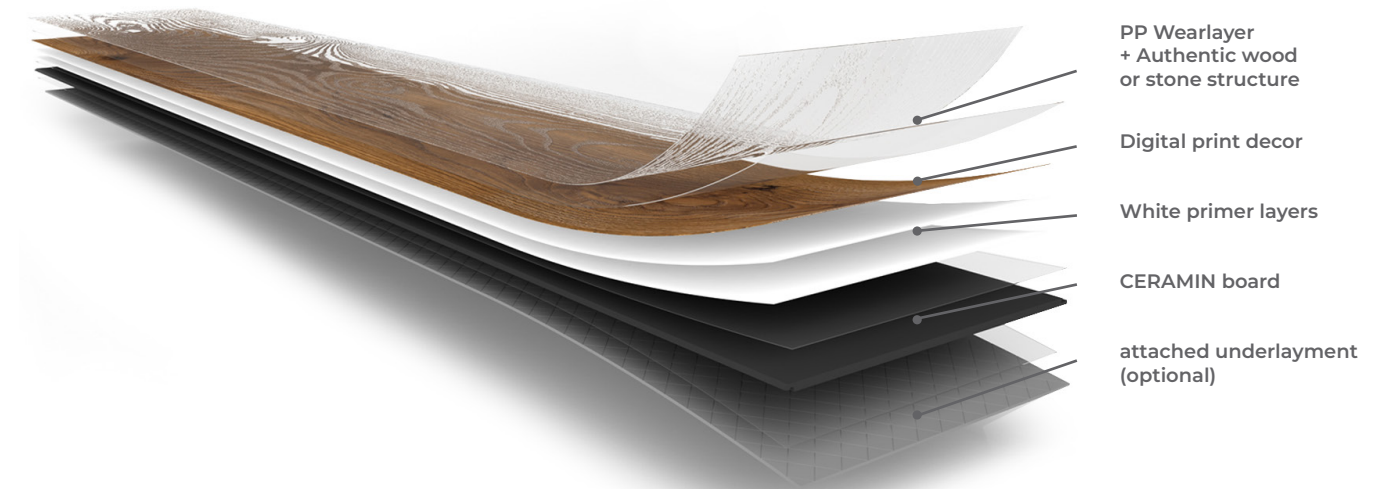



RECYCLING STRATEGY

Produced from recycled material

- For CERAMIN-based polymer floors, the recycled share of the total product is at least 25%
- The PP recyclates take up minimum 65% of the polymer share
- Through the use in CERAMIN, there is a so-called upcycling of the recycled material into a high-quality product with a long life

100% recyclable

- The independent network for the plastics recycling plastship GmbH has tested CERAMIN for its recyclability and certifies it as a very recyclable
- CLASSEN actively participates in the circular economy / Joint Venture Hündgen (HC Plastic)
- CERAMIN products from CLASSEN meet the requirements of the label of the Eco Institute and the environmental seal “Blauer Engel” of the German Federal Government, which is awarded only to wall and floor coverings without PVC.



01

CERAMIN

40%

Polypropylen(PP)
mostly Recyclate

60%

Mineral filler
(100 % naturally)



PVC

10 - 20%

**Plasticisers
& stabilisers**

10 - 25%

**Polyvinyl
chloride (PVC)**
43 % Carbon
and hydrogen
57 % Chlorine

60 - 70%

Mineral filler
(100 % naturally)



Polypropylene instead of PVC


More sustainable material for durable floor and wall coverings



HEALTHY
FOR LIVING



NO SMELL



100%
RECYCLABLE



25% LIGHTER THAN
PVC FLOORING

Our strategy: **The components of today are the raw materials of tomorrow**

02

ALL ABOUT ECO

1290 x 203 x 4 mm



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



WOODEN
STRUCTURE



EASYLOC



All About Eco – Parisian



Baltic 65006
1290 x 203 x 4 mm / wooden str.



Parisian 65007
1290 x 203 x 4 mm / wooden str.



Venice 65008
1290 x 203 x 4 mm / wooden str.



Pacific 65009
1290 x 203 x 4 mm / wooden str.



Liberian 65010
1290 x 203 x 4 mm / wooden str.



Antonio 65011
1290 x 203 x 4 mm / wooden str.



All About Eco – Baltic



All About Eco – Venice



Canvas 65012
1290 x 203 x 4 mm / wooden str.



Caribbean 65434
1290 x 203 x 4 mm / wooden str.



Matterhorn 65435
1290 x 203 x 4 mm / wooden str.



All About Eco – Pacific



All About Eco – Liberian

03

PRO NATURE

1290 x 203 x 4 mm
1290 x 246 x 4 mm
638 x 310 x 4 mm



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



STONE/WOODEN
STRUCTURE



EASYLOC



Pro Nature – Caldas



Pro Nature – Barrow



Barrow 61862
1290 x 203 x 4 mm / wooden str.



Slaney 61870
1290 x 203 x 4 mm / wooden str.



Rockaway 61868
1290 x 203 x 4 mm / wooden str.



Flushing Bay 61874
1290 x 203 x 4 mm / wooden str.



Newtown Creek 62478
1290 x 203 x 4 mm / wooden str.



Nore 61865
1290 x 203 x 4 mm / wooden str.



Pro Nature – Nore



Mocoa 62536
1290 x 246 x 4 mm / wooden str.



Barranquilla 62537
1290 x 246 x 4 mm / wooden str.



Soledad 62538
1290 x 246 x 4 mm / wooden str.



Neiva 62540
1290 x 246 x 4 mm / wooden str.



Miranda 62539
1290 x 246 x 4 mm / wooden str.



Taraza 62545
1290 x 246 x 4 mm / wooden str.



Soacha 62541
1290 x 246 x 4 mm / wooden str.



Bello 62542
1290 x 246 x 4 mm / wooden str.



Caldas 62543
1290 x 246 x 4 mm / wooden str.



Andes 62544
1290 x 246 x 4 mm / wooden str.



Camac 63131
1290 x 203 x 4 mm / wooden str.



Brosna 63132
1290 x 203 x 4 mm / wooden str.



Dennett 63133
1290 x 203 x 4 mm / wooden str.



Oak Kisuca 64636
1290 x 246 x 4 mm / wooden str.



Oak Sajo 64637
1290 x 246 x 4 mm / wooden str.



Napo 67206
1290 x 203 x 4 mm / wooden str.



Fergus 63134
1290 x 203 x 4 mm / wooden str.



Lagan 63135
1290 x 203 x 4 mm / wooden str.



Sumatra 63136
1290 x 203 x 4 mm / wooden str.



Pro Nature – Oak Kisuca



Oak Wag 64632
1290 x 246 x 4 mm / wooden str.



Oak Ipola 64633
1290 x 246 x 4 mm / wooden str.



Oak Poprad 64634
1290 x 246 x 4 mm / wooden str.



Oak Bodrog 64635
1290 x 246 x 4 mm / wooden str.




Pro Nature – Oak Ipola



Pro Nature – Milford



Milford 63138
638 x 310 x 4 mm / stone str.

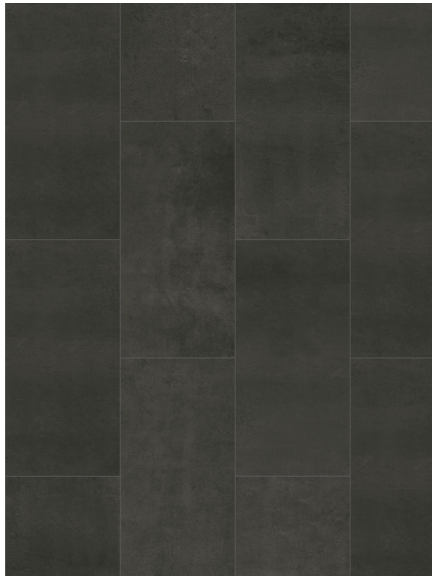

Freemount 63210
638 x 310 x 4 mm / stone str.



Killelton 63137
638 x 310 x 4 mm / stone str.

04

ALL NATURE

1290 x 203 x 4 mm



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



WOODEN
STRUCTURE



EASYLOC



All Nature – Sable



Sable

63511

1290 x 203 x 4 mm / wooden str.



Pinnacle

63512

1290 x 203 x 4 mm / wooden str.



Wakhan

63513

1290 x 203 x 4 mm / wooden str.



Pitcairn

63514

1290 x 203 x 4 mm / wooden str.



Kimberley

63515

1290 x 203 x 4 mm / wooden str.



Chile

63516

1290 x 203 x 4 mm / wooden str.



Lusaka

63517

1290 x 203 x 4 mm / wooden str.



Mungo

63518

1290 x 203 x 4 mm / wooden str.



Banff

63519

1290 x 203 x 4 mm / wooden str.

05-1

CERAMIN FLOORING

With integrated underlay

1290 x 203 x 5 mm



WITH INTEGRATED
UNDERLAY



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



WOODEN
STRUCTURE



EASYLOC



Ceramin Flooring – Tyrrhenian



Ceramin Flooring – Amazonian



Amazonian 65137
1290 x 203 x 5 mm / wooden str.



Danubian 65139
1290 x 203 x 5 mm / wooden str.



Bengali 65140
1290 x 203 x 5 mm / wooden str.



Tasmanian 65141
1290 x 203 x 5 mm / wooden str.



Andalusian 65138
1290 x 203 x 5 mm / wooden str.



Iberian 65142
1290 x 203 x 5 mm / wooden str.



Safari 65144
1290 x 203 x 5 mm / wooden str.



Timeless 66881
1290 x 203 x 5 mm / wooden str.



Maori 65146
1290 x 203 x 5 mm / wooden str.



Tyrrhenian 65147
1290 x 203 x 5 mm / wooden str.



Ceramin Flooring - Tyrrhenian

05-2

CERAMIN FLOORING

With integrated underlay

1290 x 203 x 4 mm



WITH INTEGRATED
UNDERLAY



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



WOODEN
STRUCTURE



EASYLOC



Ceramin Flooring – Golgos



Kadmos 66158
1290 x 203 x 5 mm / wooden str.



Golgos 66159
1290 x 203 x 5 mm / wooden str.



Side 66160
1290 x 203 x 5 mm / wooden str.



Arkas 66156
1290 x 203 x 5 mm / wooden str.



Akis 66884
1290 x 203 x 5 mm / wooden str.



05-3

CERAMIN FLOORING

Without integrated underlay

1290 x 203 x 4 mm



UC33

USAGE
CLASS



25Y

GUARANTEE



4+1
mm

THICKNESS



V-GROOVE



WOODEN
STRUCTURE



EASYLOC



Ceramin Flooring – Romulus



Remus 66150
1290 x 203 x 4 mm / wooden str.



Romulus 66880
1290 x 203 x 4 mm / wooden str.



Milene 66875
1290 x 203 x 4 mm / wooden str.



Cristiano 66876
1290 x 203 x 4 mm / wooden str.



Ceramin Flooring – Remus



Cathrine 66174
1290 x 203 x 4 mm / wooden str.



Ceramin Flooring – Cathrine

06

GREEN VINYL

1290 x 173 x 3,8 mm
 1290 x 173 x 4 mm
 1290 x 203 x 4 mm
 1290 X 246 X 4 mm
 638 x 310 x 4 mm



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



STONE/WOODEN
STRUCTURE



EASYLOC



Green Vinyl – Eiche Rustic



Traubeneiche 48317
1290 x 173 x 3,8 mm / wooden str.



Pinie Gekalkt 48318
1290 x 173 x 3,8 mm / wooden str.



Weisseiche 48319
1290 x 173 x 3,8 mm / wooden str.



Eiche Natur 48320
1290 x 173 x 3,8 mm / wooden str.



Schnee-Eiche 51997
1290 x 173 x 3,8 mm / wooden str.



Sandeiche DY 51998
1290 x 173 x 3,8 mm / wooden str.



Green Vinyl – Sandeiche DY



Steineiche 48341
1290 x 173 x 4 mm / wooden str.



Eiche Gek. Gr. 49780
1290 x 173 x 4 mm / wooden str.



Risseiche Nat. 49781
1290 x 173 x 4 mm / wooden str.



Pinie Weiss 48336
1290 x 173 x 4 mm / wooden str.



Traubeneiche Geho. 48337
1290 x 173 x 4 mm / wooden str.



Risseiche Dunkel 48338
1290 x 173 x 4 mm / wooden str.



Eiche Creme 49782
1290 x 173 x 4 mm / wooden str.



Eiche Rustic 52044
1290 x 173 x 4 mm / wooden str.



Eiche Alpin 52045
1290 x 173 x 4 mm / wooden str.



Green Vinyl – Eiche Rustikal



Eiche Rustikal 55516
1290 x 203 x 4 mm / wooden str.



Natureiche Hell 55517
1290 x 203 x 4 mm / wooden str.



Strandeiche 56778
1290 x 203 x 4 mm / wooden str.



Risseiche Braun 56779
1290 x 203 x 4 mm / wooden str.



Karpaten Eiche 56944
1290 x 203 x 4 mm / wooden str.



Grappa Eiche 56945
1290 x 203 x 4 mm / wooden str.



Windeck E. D. DY 52397
1290 x 246 x 4 mm / wooden str.



Windeck Eiche DY 52399
1290 x 246 x 4 mm / wooden str.



Windeck E. H. DY 52398
1290 x 246 x 4 mm / wooden str.



Green Vinyl – Windeck E. D. DY



Green Vinyl – Windeck E. H. DY



Eiche Greige 63371
1290 x 246 x 4 mm / wooden str.



Eiche Rustikal 63370
1290 x 246 x 4 mm / wooden str.



Eiche Sand 63369
1290 x 246 x 4 mm / wooden str.



Nat.Eiche Beige 63372
1290 x 246 x 4 mm / wooden str.



Resseich.Beige 63367
1290 x 246 x 4 mm / wooden str.



Resseich.Braun 63368
1290 x 246 x 4 mm / wooden str.



Green Vinyl – Resseich.Beige




Green Vinyl – Infinity Light DY



Nimbus Dark 49783
638 x 310 x 4 mm / stone str.



Nimbus Beige 49784
638 x 310 x 4 mm / stone str.

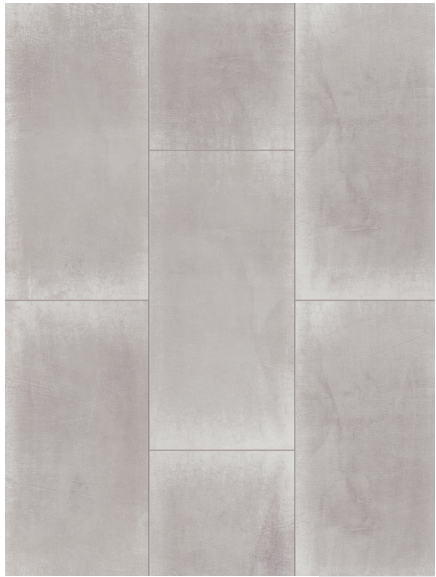


Light Stone 52042
638 x 310 x 4 mm / stone str.



Infinity Light DY 52293
638 x 310 x 4 mm / stone str.



Deep Stone 52043
638 x 310 x 4 mm / stone str.

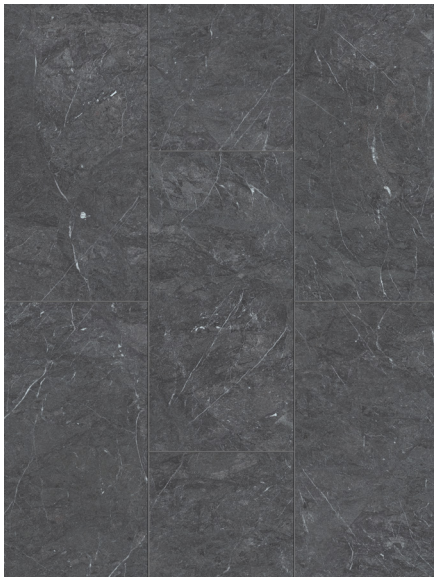

Infinity Dark DY 52292
638 x 310 x 4 mm / stone str.

07

NEO 2.0

1290 x 173 x 4,5 mm / Wood
638 x 310 x 4,5 mm / Stone



USAGE
CLASS



GUARANTEE



THICKNESS



V-GROOVE



STONE/WOODEN
STRUCTURE



EASYLOC



Neo 2.0 – Wood Canad. Summer Oak



Neo 2.0 – Wood African Maple



Tanned Oak 40767
1290 x 173 x 4,5 mm / wooden str.



Refined Oak 41116
1290 x 173 x 4,5 mm / wooden str.



Brownshaded Elm 41120
1290 x 173 x 4,5 mm / wooden str.



Bright Oak 51724
1290 x 173 x 4,5 mm / wooden str.



African Maple 40921
1290 x 173 x 4,5 mm / wooden str.



Canad.Summer Oak 40835
1290 x 173 x 4,5 mm / wooden str.



Elm Silvergrey 40922
1290 x 173 x 4,5 mm / wooden str.



Seawashed Oak 41638
1290 x 173 x 4,5 mm / wooden str.



Neo 2.0 – Wood Seawashed Oak



Grizzled Rock 51723
638 x 310 x 4,5 mm / stone str.



Coolgrey Loft 40811
638 x 310 x 4,5 mm / stone str.



Whitestream Stone 40812
638 x 310 x 4,5 mm / stone str.



Mystery Stone 41121
638 x 310 x 4,5 mm / stone str.



Mineral Slate 40813
638 x 310 x 4,5 mm / stone str.



Silvergr. Concr. 40814
638 x 310 x 4,5 mm / stone str.




Neo 2.0 – Mystery Stone

08 QUICK AND EASY



Thanks to the EASYLOC locking system, CERAMIN is user-friendly and allows for quick, precise positioning during installation

OUR INSTALLATION SYSTEMS

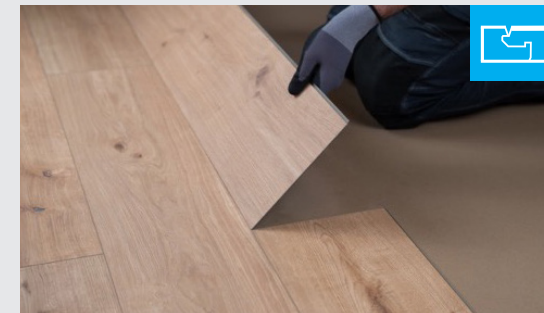

megaloc

- Push2Loc-Profile
- patented CLASSEN solution
- from 4.5 mm thickness
- Easier and faster installation

SCAN & SEE
how easy it is to lay
a CERAMIN floor





easyloc

- Angle-Angle Profile
- patented CLASSEN solution
- under 4.5 mm



Base

You can install the CERAMIN with use underlay by clicking on it or gluing it to the screed floor.



Underfloor heating

Friendly to warm water and electric underfloor heating systems. The surface temperature must not exceed 29°C.



Easy cut

Need to cut the plank? Use a cutter knife!
Need to make a hole? Use a compass!
Quickly and without dust.

100% WATERPROOF



Thanks to its 100% waterproof core, CERAMIN provides proven protection against moisture. It will not swell or absorb water, making it the perfect choice for everyday use, wet cleaning, and installation in wet rooms



Thanks to its PVC-free composition, CERAMIN is a safe and sustainable flooring solution. It contains no harmful plasticizers or chlorine, making it ideal for healthy living environments, eco-conscious projects, and spaces with high indoor air quality requirements



OUR FORMATS



All About Eco – Caribbean



@ClassenFloorPoland
@ClassenFloorUkraine
@Classen.Group



classen_floor
classen_group



classen_floor



ClassenFloor
Instructions and films



Classen Cloud
Download app with our floors



Classen Competence Centre
Showroom and advice for our customers

www.classenfloor.com
www.ceramin.de

Classen Floor Systems Sp. z o.o.
ul. Wyzwolenia
44-292 Zwonowice, Poland
www.classenfloor.pl

CLASSEN Group
Werner-von-Siemens-Str. 18-20
56759 Kaisersesch, Germany
www.classengroup.com

Showroom:
ul. Aleja Pokoju 18B,
31-564 Krakow, Poland

2025.06
The catalogue does not constitute an offer within the meaning of commercial law. Classen Floor Systems Sp z o.o. reserves the right to change and improve the products presented in this publication without prior notice. Information contained in this catalogue is correct at the time of publishing.

Colours presented in this catalogue may differ from the products that are on sale.